

>> Fuel Dispenser Parts

经典油机配件




CP1 组合泵 Combination Pump

● **概论**

CP1、CP1A、CP1B组合泵适用于加油机配套，也可用于输送其他气液混合液。能将汽油、煤油、柴油等油类中的空气分离出去，该泵集抽吸、分离、输送功能为一体。设计合理紧凑，噪声低寿命长，铝合金压铸，造型美观。

● **Main Features**

CP1, CP1A, CP1B combination pumps for fuel dispenser can also be used to transfer other gas-liquid mixture with the function of separation the air from gasoline, kerosene, diesel, etc.. The pump is a collection of pumping, separation and transmission with advantage of reasonable and compact design, low noise, long working life, aluminum die casting, beautiful modeling.

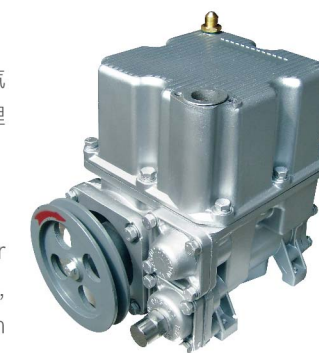

CP1

● **技术参数 Technical Specification**

电机功率 Motor power.	0.75Kw
转速 Speed.	660rpm
流量 Flow Rate	50L/min
干真空 Dry vacuum.	≥ 0.054MPa
噪音 Noise.	≤ 71dB
出口压力 Outlet pressure	0.18MPa-0.35MPa



CP1B



CP1A


CP2 齿轮泵 Gear Pump

● **概论**

CP2齿轮泵，泵体材料：铸铁，用于汽油、煤油、柴油、乙醇汽油等混合性燃油，分为A型和B型两种不同的进口结构。泵体内置了汽油分离器、止回阀、溢流阀、出口阀、进口过滤网。

● **Main Features**

CP2 gear pump, made by cast iron is applicable to gasoline, kerosene, diesel and gasohol. There are type A and type B inlets of the pump. Air separator, by-pass valve, check valve, outlet valve and inlet filter are built-in.

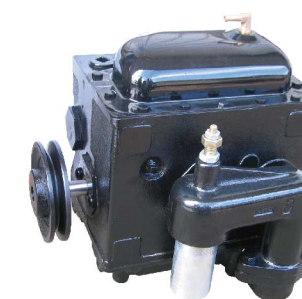

CP2

● **技术参数 Technical Specification**

转速 Speed.	900rpm
CP2/CP2A/CP2B 流量 Flow Rate	45L/min-55L/min
CP2C 流量 Flow Rate	75L/min-85L/min
真空度 Vacuum.	≥ 0.06MPa
噪音 Noise.	≤ 72dB
出口压力 Outlet pressure	0.18MPa-0.24MPa



CP2A(CP2C)



CP2B

