


JIASONG[®]

J A S E N T

ZHEJIANG JIASONG
TECHNOLOGY CO.,LTD

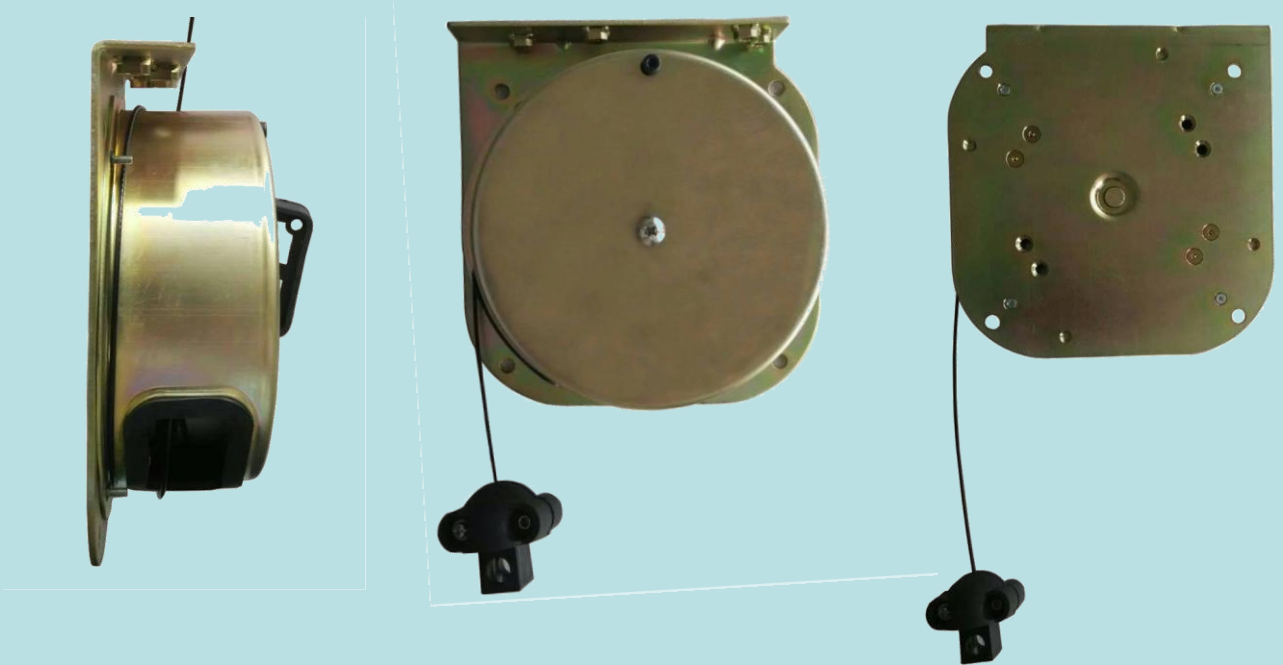

LSQ3 HOSE RETRACTOR

➤Main Features

- Hose retractor mainly depend on the spiral spring energy accumulation. To make the hose in the state of "floating" in the air, The elastic potential energy and the gravity balance. Avoid rubber hose and ground friction, not occupy the surrounding area, but the entire fuel machine look more beautiful.

➤Application

- Widely used in retractable fuel dispenser hose


➤Characteristic

- Hose retractor can gently pull the hose up and down, greatly reduce labor intensity and increase work efficiency.
- Hose retractor without electrical or pneumatic risk, and with self-locking ratchet pawl, to use more convenient and secure.
- Products manufactured core nest coil spring by the German company, the use of the rope length of the 1.5m is not less than 100000 times the use of life testing.

➤Technical Specification


Model	Load (N)		Rope length (m)	Weight (kg)
	Min	Max		
LSQ3	40	75	3	2.5
LSQ3A	60	120	2	2.8

➤Construction

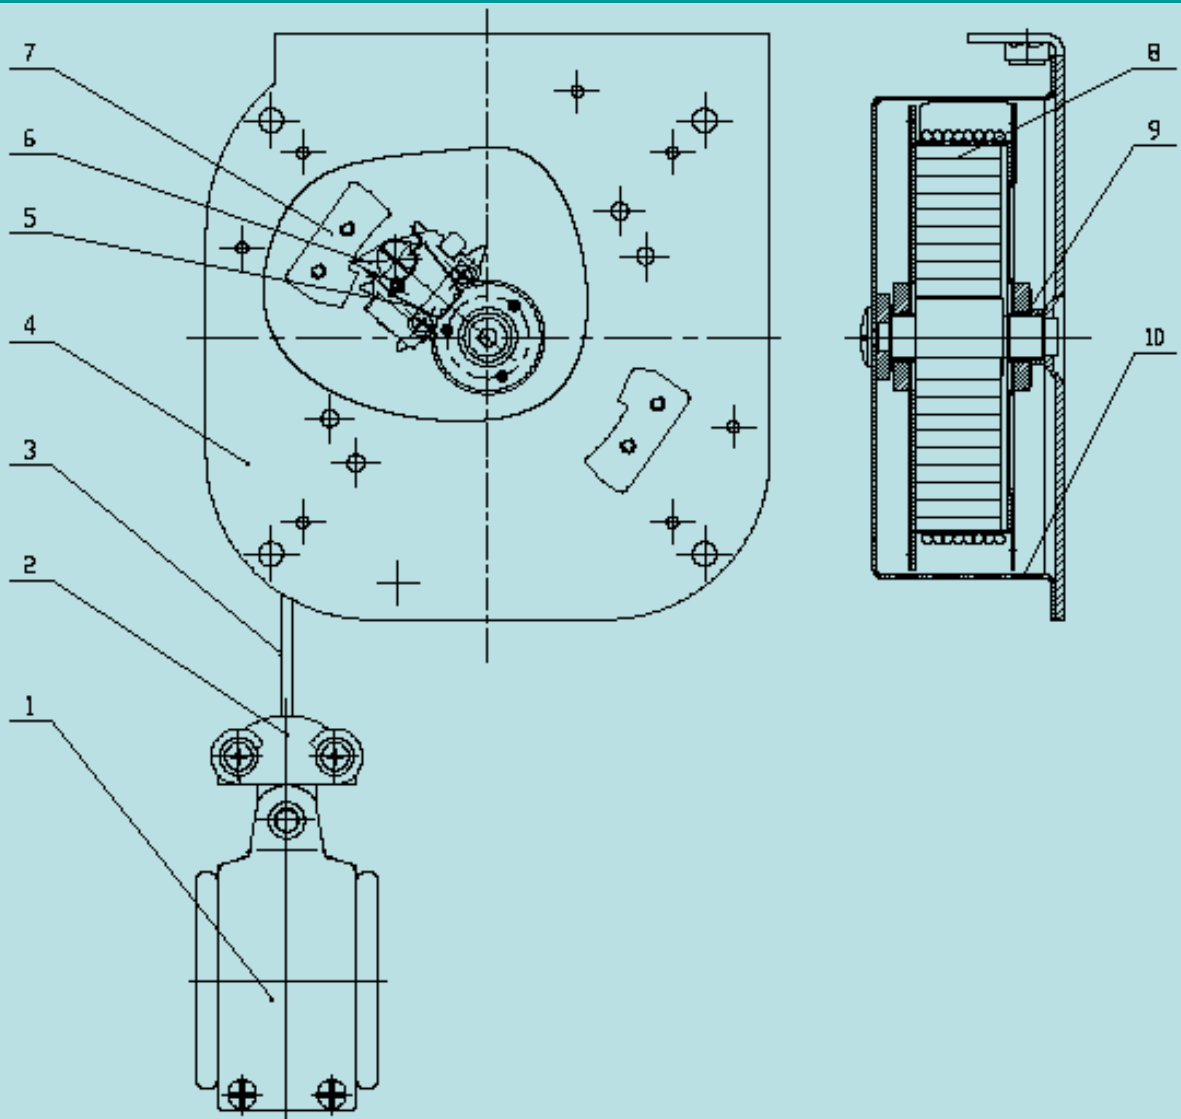


NO.	Name	Material	NO.	Name	Material
1	Hose clamp	POM	6	Pawl	GCr15
2	Cushion	Nitrile rubber	7	Card bit faster	65Mn
3	Rope	304/PE	8	Waterloo coil spring	/
4	Mounting plate	Q235-A	9	Composite Bearings	SF-1
5	Spring leaf	50CrVA	10	Case	Q235-A

➤ Mounting dimensions

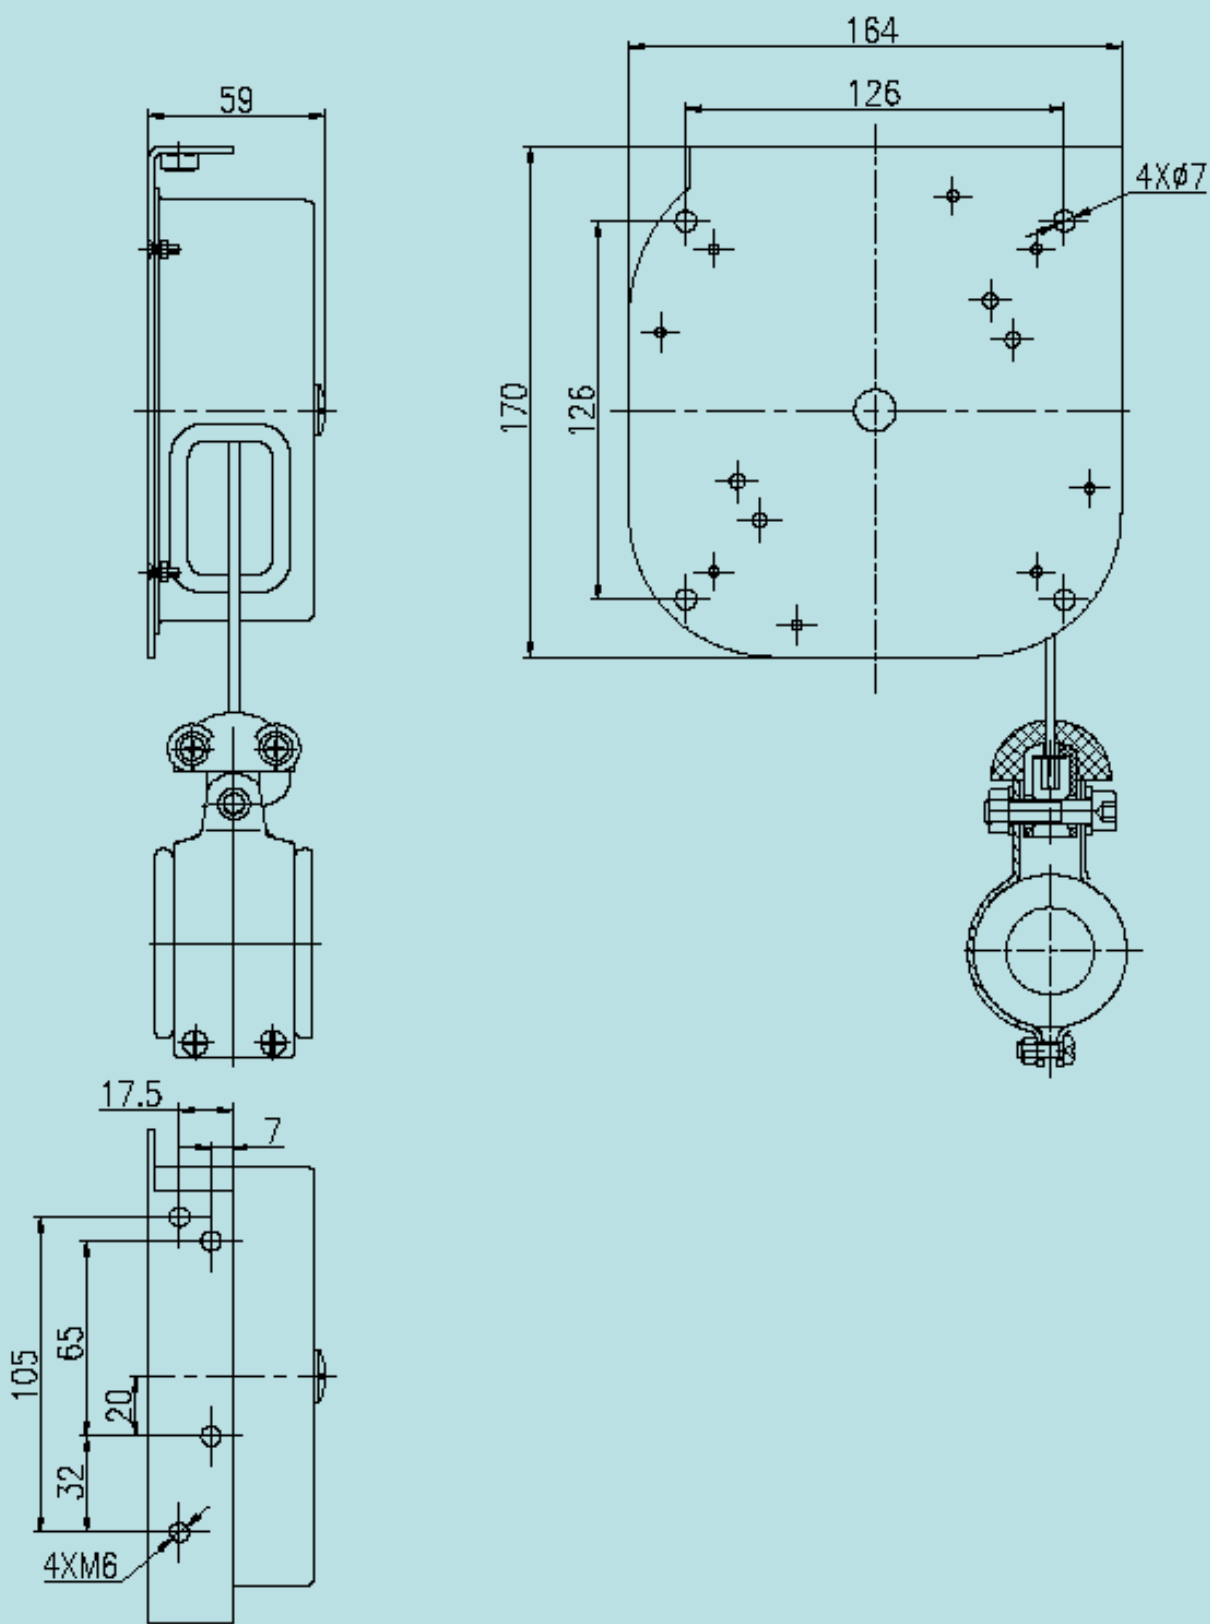

➤ Mounting angle

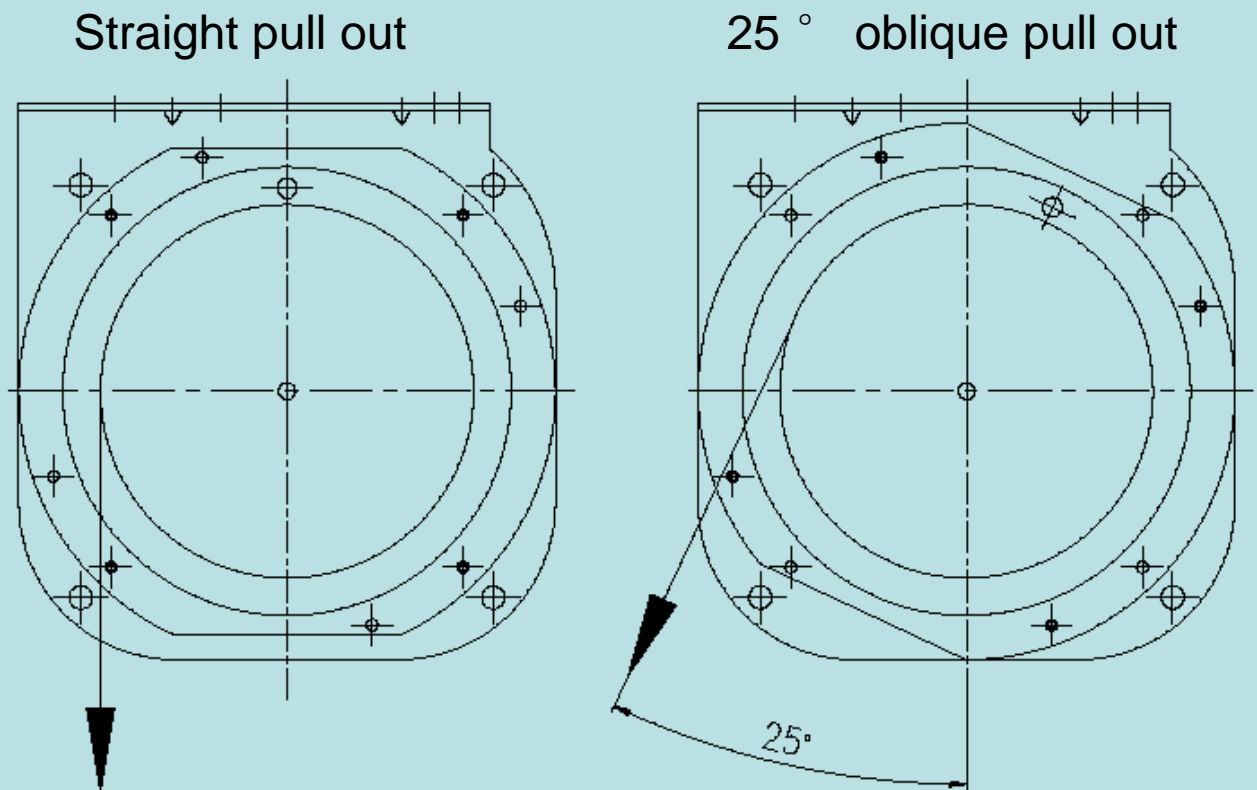

➤ Ordering instructions

- The initial tension required by the user
- Pull angle
- Pull length

➤ Recommended spare parts

- Spring, pawl, wire rope

浙江嘉松科技有限公司

ZHEJIANG JIASONG TECHNOLOGY CO.,LTD

地址 (Add): 浙江省永嘉县瓯北镇浦一工业区

Puyi Industry Zone, Oubei Town, Yongjia,

Wenzhou, Zhejiang, China

电话 (TEL): 0086-577-67352778/67353517

传真 (Fax): 0086-577-67355517 邮编 (P.C): 325105

邮箱 (E-mail):